


A-Lok® Blind Fastener

star

FASTENERS

A-Lock™ blind rivets provide robust fastening of metal to wood, FRP, plastics and fiberglass without through holes. A-Lock™ rivets peel from the blind side when set and lock themselves into the application. Once locked in place, these rivets offer superior pull-out strength and vibration resistance. This product is T.I.R. approved.




APPLICATIONS

- Automotive
- Commercial vehicle bodies
- Trailers
- Buses
- Trains
- General sheet metal fabrication

HUCK

A-Lok® Blind Fastener


Dimensional Data

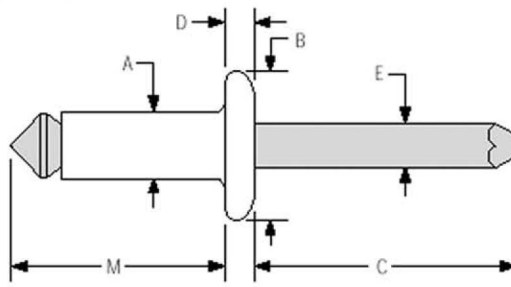

measurements in mm

Dia. (No.)	Part Number	A	B	C min	D	E nom	M
4.8 (6)	TSBS-6120	4.52-4.74	9.83-10.19	34.04	1.88-2.06	2.79	13.21-14.48


Grip Data

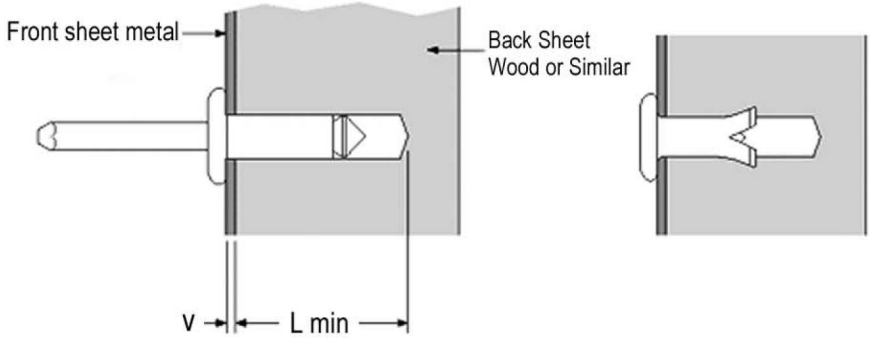

measurements in mm

Dia.	(No.)	Recommended Hole Size	V min-max	L min at V min	L min at V max
4.8	(6)	4.76-4.89	0.25-3.05	12.19	9.39

Installation Sequence

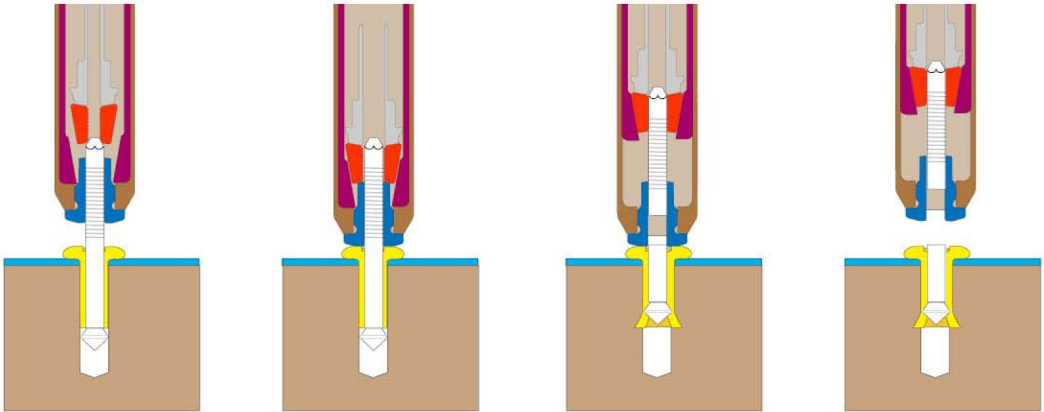

Installed Values

Typical Installed Values		
Diameter	Material	Pull-Out Strength (KG)
4.8	Body: low carbon steel, zinc plated Mandrel: low carbon steel 220	99.79

Disclaimer

Whilst every care has been taken to ensure the accuracy of the above information, Star Fasteners (UK) Limited cannot accept responsibility for any errors or omissions.

Telephone: +44 (0) 115 932 4939

E-mail: sales@starfasteners.co.uk

Star Fasteners (UK) Ltd. Unit 1, 44 Brookhill Road, Pinxton, Nottingham, UK. NG16 6RY

